Under Furnace Air Filtration

ProgressiveMedia[™] **Whole House Air Cleaner**



- The choice for optimizing Indoor Air Quality
- Top performing Ultravation® Progressive MERV 11 Media
- Superior dust spot ratings:
 51% initial / 56% average
- UltraStrand[™] media technology: MERV 11 efficiency—matches MERV 8 initial resistance
- Space saving under furnace support box design. Adjustable inlet and outlet
- Access door on each side to fit any installation
- Turning vane to reduce turbulence
- Fully insulated cabinet
- 10-year cabinet warranty
- Upgradable to Ultravation[®] Photronic[™]
- Don't pay more for high performance! (Compare to cost of MERV 8 filters)


Ultravation® Progressive Media Air Cleaners with UltraStrand™ media technology remove particulates as small as 3 microns! They have better capture capability yet match MERV 8 pressure drop characteristics.

The rugged and versatile cabinet design (weight capacity over 200 lbs.) with variable inlet and outlet size saves space and simplifies installation. Filter cabinet door can be positioned on either side to fit any installation configuration.

Ultravation® Progressive Filtration

- More efficient capture characteristics (see illustration): gathers large particles in the initial layer and progressively smaller particles in the filter interior.
- UltraStrand™ MERV 11 100% synthetic, continuous, thermally bonded (no chemical adhesives), high surface area media fibers.
 These high capacity fibers are formed into a progressive filter structure that has an initial dust spot rating of 51% with no more initial resistance than older technology MERV 8 media.
- Continuous fibers resist shedding, maximize holding capacity with no moisture absorption.
- UltraStrand™ high surface area fibers with permanent electrostatic charge are unequalled in particle attraction and holding capacity.



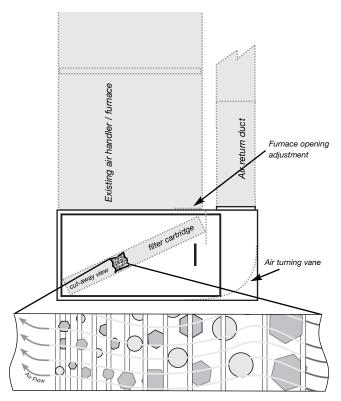

Progressive Media Filtration

Media cross-section

Ultravation® extended-life Progressive Media Air Cleaners capture large particles at the leading edge of the filter, and collect progressively smaller particles as they flow into the filter media. This unique process increases filter capacity, extends filter life and minimizes air resistance.



Ultravation® Progressive Media Air Cleaners

Technical Specifications

Under Furnace Design • Ultravation® Progressive Media Air Cleaners

Model Description		Cabinet Dimensions LWH	Adjustable Return Opening	Furnace Opening	
90-035	SBL - Insulated	42" x 28 1/2" x 17 5/8"	10"-12" x 24	Min 12" Max 19"	
90-031	SBS - Insulated	33" x 28 1/2" x 16"	8"-10" x 24	Min 6" Max 13.375"	

Progressive Media Replacement Filters with UltraStrand™ Technology

Model	Media	Rated Velocity FPM	Pressure Drop 1200 cfm	Replacement Interval	Model	
91-006	MERV 11	300	.14	6-8 months	SBL series	
91-005	MERV 11	300	.16	6-8 months	SBS series	

Above performance specifications are for normal operating conditions. Ultravation Progressive Filter Media are rated to withstand up to 2000 cfm.

Available in unpainted and/or uninsulated configurations -- call toll free 866 468 8247

Optimize Indoor Air Quality (IAQ) by combining filtration with Ultravation® UV air treatment! Ultravation® whole-house UV systems maximize reduction of mold, allergens and harmful airborne microorganisms.


Learn more at ultravation.com



Available from:		

Why MERV 11?

Choose Ultravation® Progressive MERV 11 Media for capturing very small particles (3 microns) while maintaining the efficiency of MERV 8. Ultravation® Progressive MERV 11 filters provide very low pressure drop with high dirt holding capacity for long life.



Progressive design of Ultravation® UltraStrand™ 100% synthetic MERV 11 filter fibers.

All Ultravation® Progressive Media Air filters have been tested using ANSI / ASHRAE 52.2-1992 standard test procedures.

Custom color matching service available.

Designed and manufactured in USA by Ultravation, Inc.



Members:











